Elafris Energy
Energy Everyday
0773 012 993 | 0714 185 881
196 Samora Machel Ave
Eastlea, Harare
elafrisenergy@gmail.com
• On Grid Systems • Accessories • Solar Water Pumping Systems
• Home Systems • Off-Grid Systems • Solar Powered Traffic Light Systems

Site Name	15157 Caledonia
Survey Date	07/11/2025
Report Date	11/11/ 2025
Survey Team	Sam Nyama

Introduction

The Survey was done on 07 November 2025, at the request of Chisipiti Phase 15 Community Borehole. This report gives an outline of the geophysical survey findings and the recommendations made from the borehole siting.


Geology / Hydrogeology

Granite

Field Work

Geophysical investigations were carried out to determine the nature of weathering and fracturing, the depth to bedrock and the results are shown below:

Profile Map

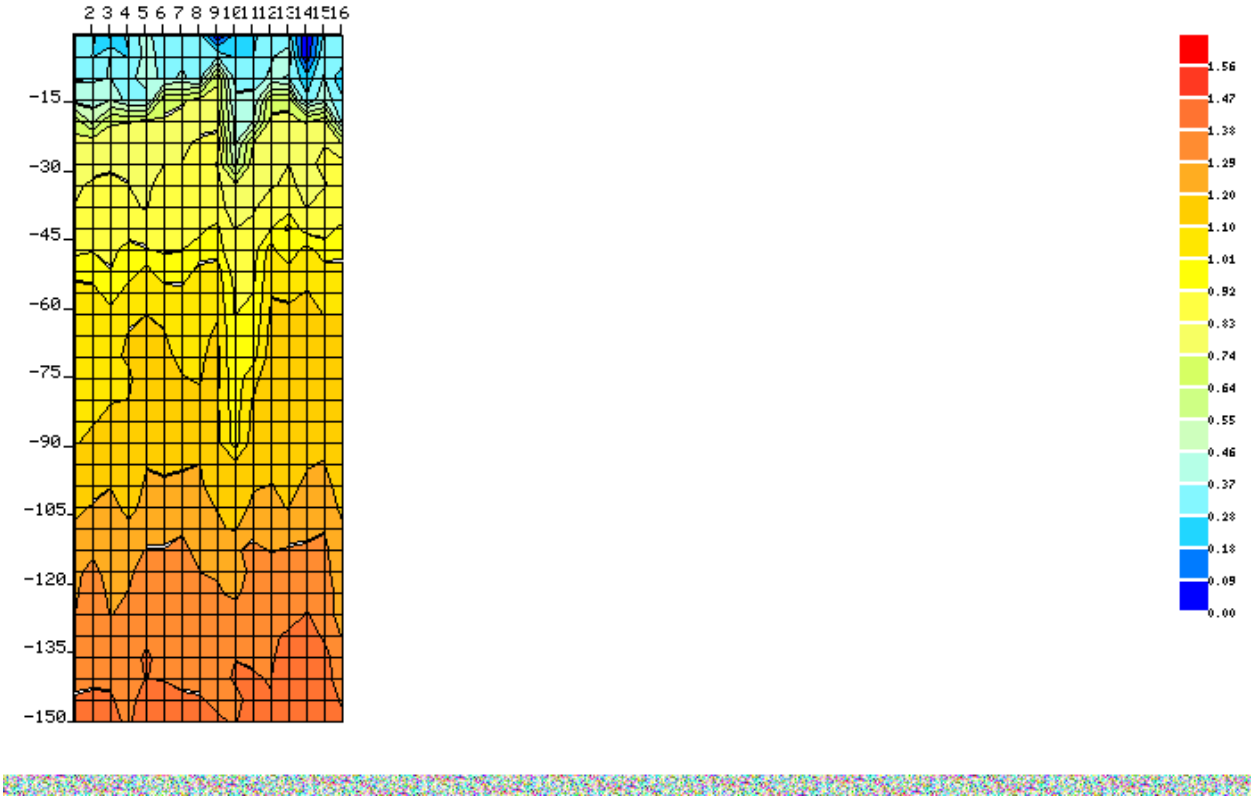

Discussion

Survey was quite satisfactory Peg 11 showed higher probability of water due to deeper weathering and displays a good fracture. Unfortunately, the area is granite bound hence high depths are required for this project to be satisfactory

Recommendation

- Drilling should be done between the ranges of 60m to 80m.

Points to take into account when the drilling procedure takes place are as follow:

1) Due to power from compressors they usually block faults which will require one to leave the borehole for some weeks if water is not struck to give time for faults to clear then a capacity test procedure will be carried out.

2) Not all areas produce same volume of water

3) Complete the borehole procedure by flushing out

4) Dry hole is concluded after 10 days.

Recommendations given are expressed in good faith based on the observed geology, geophysical, topographical, botany, soil and slope factors and no guarantee can be given.